

Technical Data Sheet

1.4 mm Height Subminiature, Axial Flat Top View LED

28-21UYC/S530-XX/XXX

Features

- Package in 12mm tape on 7" diameter reels.
- Compatible with automatic placement equipment.
- EIA Std. package.
- Mono-color type.
- Pb-free
- The product itself will remain within RoHS compliant version.

Descriptions

- The 28-21 SMD LED is much smaller than leaded components. Thus enable smaller board size. Higher packing density. Reduced storage space and finally smaller equipment to be obtained.
- Besides, light weight makes them ideal for miniature applications.
- Furthermore by automation assembly machines the accuracy is anticipated.

Applications

- Small indicator for indoor applications.
- Flat backlight for LCD, switches and symbols.
- Indicator and backlight in office equipment.
- Indicator and backlight for battery driven equipment.
- Indicator and backlight for audio and video equipment.
- Automotive : backlighting in dashboards and switches
- Telecommunication: indicator and backlighting in telephone and fax.

Device Selection Guide

Everlight Electronics Co., Ltd.

D. AM		T 0.1	
Part No.	Material	Emitted Color	Lens Color
28-21UYC/S530-XX/XXX	AlGaInP	Brilliant Yellow	Water Clear

Rev. 2

Page: 1 of 9

F8/TR8 28-21


Device No.: SZDLE-281-001 Prepared date: 30-Jun-2011 Prepared by: Xie haitao


http://www.everlight.com



28-21UYC/S530-XX/XXX

Package Outline Dimensions

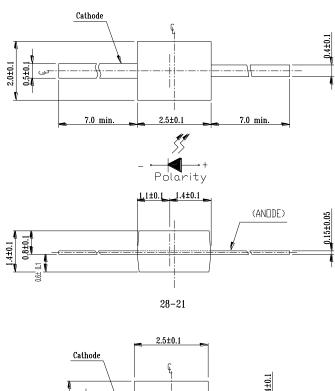

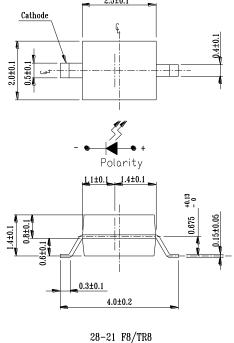

Note:

Tolerances unless dimension ±0.1

Angle ±5 Unit : mm

Note: Tolerances Unless Dimension is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 2 of 9

Device No.: SZDLE-281-001 Prepared date: 30-Jun-2011 Prepared by: Xie haitao



28-21UYC/S530-XX/XXX

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	I_{F}	25	mA	
Peak Forward Current(Duty 1/10 @ 1KHz)	I_{FP}	60	mA	
Power Dissipation	P_d	60	mW	
Electrostatic Discharge	ESD	2000	V	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +100	$^{\circ}\!\mathbb{C}$	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)

Parameter	Symbol	Chip Rank	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	$I_{ m V}$	A2	12.0	30.0		mcd	I _F =20mA
		A3	21.0	33.0			
		A4	34.0	45.0			
		A5	42.0	61.0			
		A6	53.0	77.0			
		A7	66.0	91.0			
Viewing Angle	2 <i>θ</i> 1/2			150		deg	
Peak Wavelength	λp			591		nm	
Dominant Wavelength	λd			589		nm	
Spectrum Radiation Bandwidth	Δλ			15		nm	
Forward Voltage	V_{F}		1.7	2.0	2.4	V	
Reverse Current	I_R				10	μ A	V _R =5V

Notes:


Tolerance of Luminous Intensity ±11%


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 3 of 9





28-21UYC/S530-XX/XXX


Typical Electro-Optical Characteristics Curves

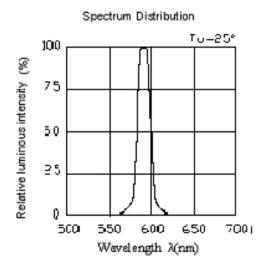


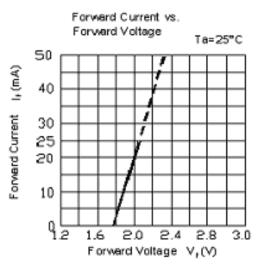

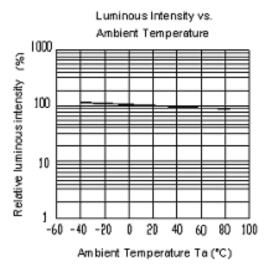

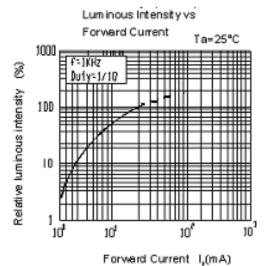

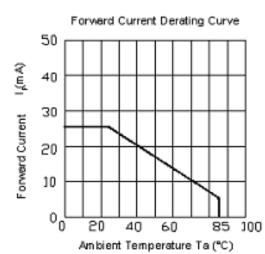

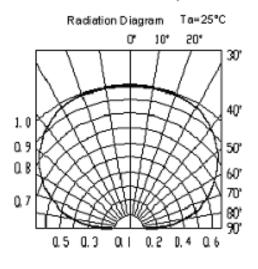

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 4 of 9



28-21UYC/S530-XX/XXX

Material Descriptions

28-21 <u>UYC</u> / <u>S530-XX</u> / <u>XXX</u>

1 2 3 4

1.production part no.:28-21

2.chip part no.& epoxy color

AlGaInP = UY...

C = water clear

3.chip size: S530 (9mil)

chip rank:A2~A7

4.packing method:

(1)NONE,F8: Bulk


(2) TR8: Taping

Label explanation


CAT: Luminous Intensity (mcd)

HUE: Dom. Wavelength (nm)

REF: Forward Voltage (V)

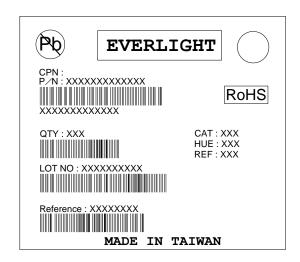

Reel & Carrier Tape Dimensions

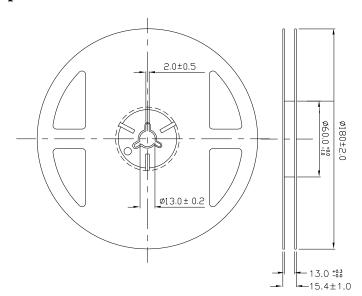

Note: Tolerances Unless Dimension is ± 0.1 mm, Unit = mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 5 of 9

Device No.: SZDLE-281-001 Prepared date: 30-Jun-2011 Prepared by: Xie haitao




28-21UYC/S530-XX/XXX

Loaded quantity per reel 1000 PCS/reel

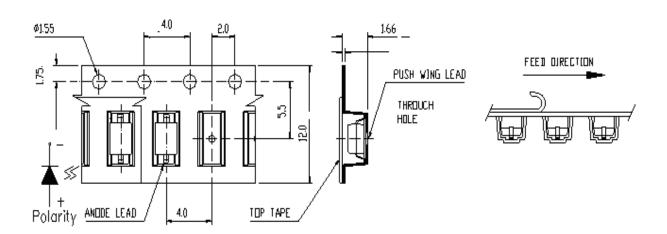

Note: Tolerances Unless Dimension is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

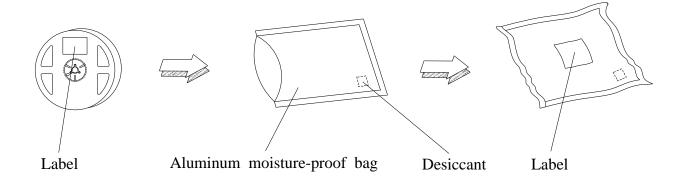

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 6 of 9

Device No.: SZDLE-281-001 Prepared date: 30-Jun-2011 Prepared by: Xie haitao



28-21UYC/S530-XX/XXX

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level:

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5 sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	H:+100°C 15 min. ∫ 5 min. L:-40°C 15 min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5 min. $\int 10 \text{ sec.}$ $L: -10^{\circ}\mathbb{C}$ 5 min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -40°ℂ	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 Hrs.	22 Pcs.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 7 of 9



28-21UYC/S530-XX/XXX

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile

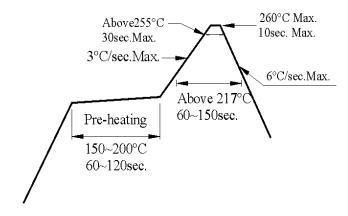

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 8 of 9




28-21UYC/S530-XX/XXX

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

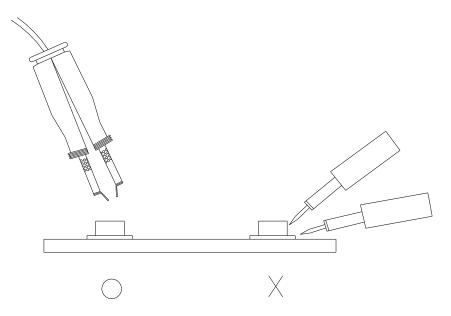

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 9 of 9